

Sterling 40


The Solar Gard Sterling series is a spectrally selective film with a high level of visible light transmission. The Sterling series also provides extraordinary solar energy rejection performance. This allows for a luminous and more beautiful interior, while ensuring a comfortable and temperate environment.

. O'Y(Uē >η@U%Oū ' >æUē " zYāā 2 ' S@ 'η%6² ā 2z 'Y(@gabēē Yāz gabēē' gηi Ā@z 'Uī 2 2' Qz O' { @ō('qz' āD² Y- qYqī² 'qz' @- ē-ū 'ōYq @ē . O'Y(Uē >æUē " Yz'gη- ĀηYz qz' S@ Y%ηi U' qYQ' āqz Yāz UηU- Q² gz Y' z+āDηūē Oūz Yz² 'æU- zYqz Uē S'āqz' @² zū ē Yη Oūē fīz āē ĀOūqī Oūē Yz' āDqī ēāOūi 2' ēāē Uēi Uā@Y@- ēzī + zāĀ@Y OāDgāēāēi āz 2' " Oū² āYQ' āē i 2z O-] O² gz gηi² %ηē] @ zāēē- Ā{ Uē



	Sterling 40		Sterling 40		Sterling 40	
	.87	.37	.77	.44	.70	.45
	0	58	0	44	0	36
	13	63	23	56	30	55
	17	87	-	-	-	-
	1.04	1.13	1.05	.87	1.06	.78
	85	29	73	26	63	23
	7	34	14	38	19	43
	8	37	13	36	18	34
	90	41	82	38	75	35
	8	33	15	35	20	38
	8	30	15	31	20	32
	0	54	0	53	0	52
	.84	.68	.84	.68	.84	.68
	5.8	5.3	2.8	2.7	1.8	1.8
	0	8	0	4	0	3
Ultraviolet light	Rayons ultraviolets					
Blocked @300 to 380 nm %	36	>99	51	>99	61	>99
	Réduction @ 300 à 380 nm %					
	85	33	74	30	66	28
	0	61	0	59	0	58
	Contrôle de décoloration					

Visible light transmission @ 550nm

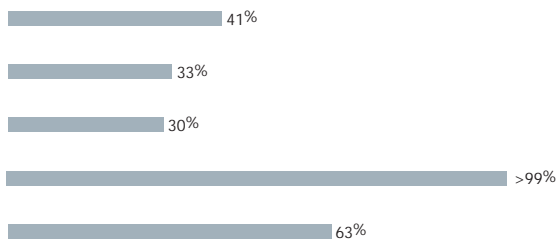

Order information *Informations commande*

Width of roll / <i>Largeur du rouleau</i>	Product code / <i>Référence Produit</i>	Length of roll / <i>Longueur rouleau</i>
48" / 1.21 meters	SF52004002-48100	
60" / 1.52 meters	SF52004002-60100	
72" / 1.83 meters	SF52004002-72100	

