

ARCHITECTURAL WINDOW FILMS


112 - 113 - 114 - 115 - 116 - 117 - 118 - 119 - 120 - 121 - 122 - 123 - 124 - 125 - 126 - 127 - 128 - 129 - 130 - 131 - 132 - 133 - 134 - 135 - 136 - 137 - 138 - 139 - 140 - 141 - 142 - 143 - 144 - 145 - 146 - 147 - 148 - 149 - 150 - 151 - 152 - 153 - 154 - 155 - 156 - 157 - 158 - 159 - 160 - 161 - 162 - 163 - 164 - 165 - 166 - 167 - 168 - 169 - 170 - 171 - 172 - 173 - 174 - 175 - 176 - 177 - 178 - 179 - 180 - 181 - 182 - 183 - 184 - 185 - 186 - 187 - 188 - 189 - 190 - 191 - 192 - 193 - 194 - 195 - 196 - 197 - 198 - 199 - 200

...i>| }>^ VœivwV^i^i - ‡Û>•Öi@  
Solar heat gain reduction %  
Total solar energy rejected %  
Infrared rejection @780 à 2500 nm %  
^}...i lœ Åœ•>Å ...i>| }>^ Å>l^œ -6 /É- @  
Transmittance %  
Absorptance %  
,iyiVl>~Vi -  
Visible light  
Transmittance %  
,iyiVl>~Vi iYliÅ^œÅ -  
,iyiVl>~Vi ^liÅ^œÅ -  
Glare reduction %  
j^ÖVi^œ^ %jV...>Övvi^i^i Åœ•>^  
^iA}i Åœ•>^Ai lœl>•i Ai•ilji  
,i•il ~vÅ>ÅœÖ}i Çnä D Oxää ~  
,>l^œ •Ö^mAi Û^Å^L•iÉv>VliÖÅ Åœ•  
Transmission %  
,LÅœÅ «i^œ^ -  
,jyiY^œ^ -  
Lumière visible  
Transmission %  
,jyiY^œ^ iYliÅ^iÖAi -  
,jyiY^œ^ ^liÅ^iÖAi -  
,j^ÖVi^œ^ %zjL•œ Ö^Åi^i^i -

4mm Single clear / 4/12/4mm Double clear / 4mm Triple Clear

Table with 2 columns: English and French. Rows include Solar energy, Visible light, and Ultraviolet light specifications.



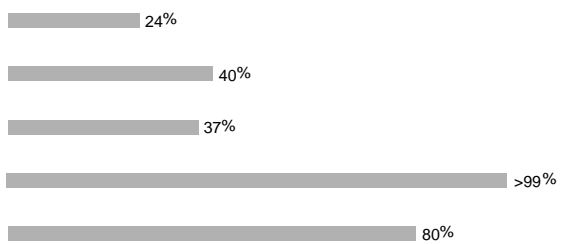

**INC IS**